

Flat Tube


Features

- The Flat Tube proves very efficient in double piping for double-acting drives. The 2-core tube of soft polyurethane is quite flexible.

Specification

Fluid admitted	Compressed air
Service pressure range	0~102psi (0~0.7MPa)
Negative pressure	-29.5in. Hg (-100KPa)
Service temperature range	5~140°F (-15~60°C) (No freezing)

Model Designation(Example)

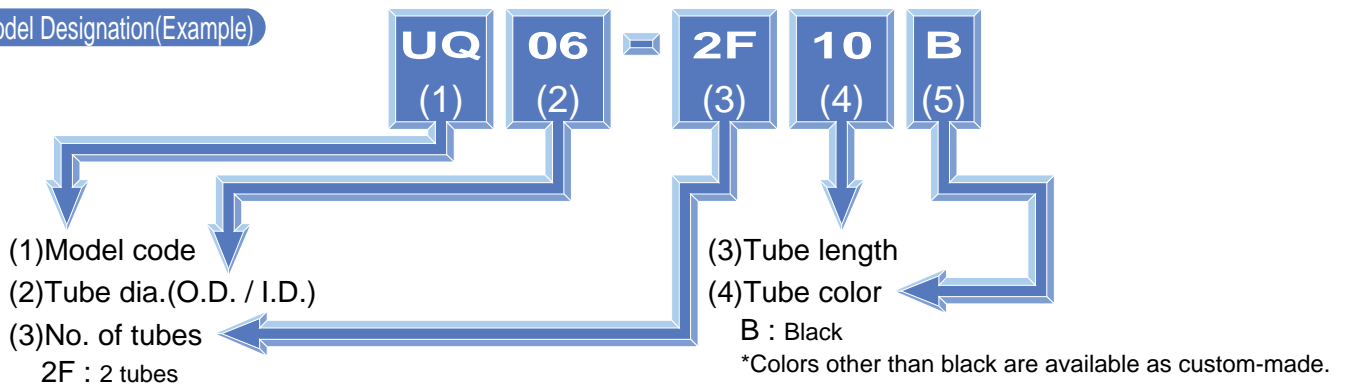

⚠ Detailed Safety Instructions

Before using the PISCO device, be sure to read the "Safety Instructions", "Common Safety Instructions for Products Listed in This Manual" on pages 23~24 and "Common Safety Instructions for Tubes" on page 551.

UQ Flat tube



Model	Tube O.D. (φmm)	Tube I.D. (φmm)	Standard length (m)	No. of tubes	Burst pressure (MPa)	Mass (g/m)
UQ 03-2F10	3	2	10	2	2.94	14
UQ 04-2F10	4	2.5	10	2	2.94	18
UQ 06-2F10	6	4	10	2	2.94	38
UQ 08-2F10	8	5	10	2	2.94	72
UQ 10-2F10	10	6.5	10	2	2.94	108
UQ 12-2F10	12	8	10	2	2.94	148