


MVMB-300-4** series

MECHANICAL VALVES

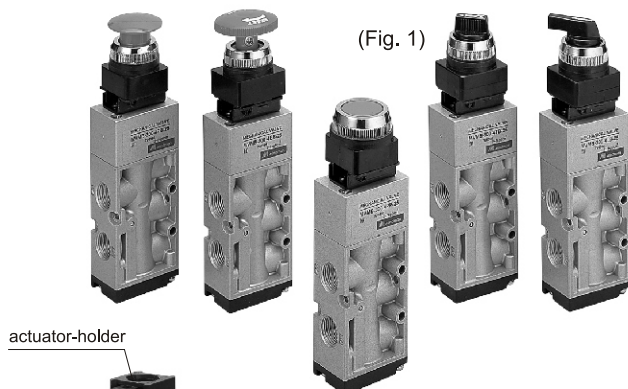

(Fig. 1)

actuator-holder




(Fig. 2)

- Only show body and actuator-holder in Fig. 2
- Actuators are exchangeable with the same holder.
- Actuator set or released by one-action.

Specification:

Model	MVMB-300-4**
Bore No.	10A
Port size	PT 3/8
No. of port	5
No. of position	2
Medium	Air
Operating pressure range	1.5~8 kgf/cm ²
Effective orifice	30 mm ²
Ambient temperature	-5~+60℃ (No freezing)
Weight	315 g



Order example:

MVMB - 300 - 4EB - 25 - BSP

MODEL

BODY WIDTH

4way


BUTTON SIZE

22: ϕ 22 (Fig. 2)
25: ϕ 25 (Fig. 1)
30: ϕ 30 (Fig. 1)

EB: palm latching actuator
LB: lever actuator
TB: turning actuator
PB: palm actuator
PP: palm button

PORT THREAD
Blank: PT thread
BSP: BSP thread
NPT: NPT thread

MVMB-300-4**

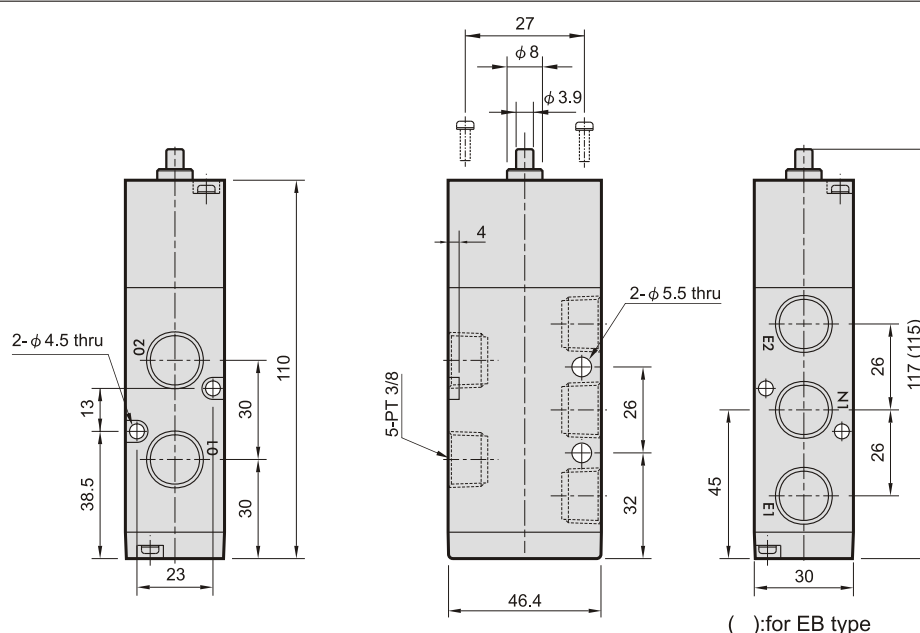


MVMB-300-4**


MECHANICAL VALVES




4EB-25

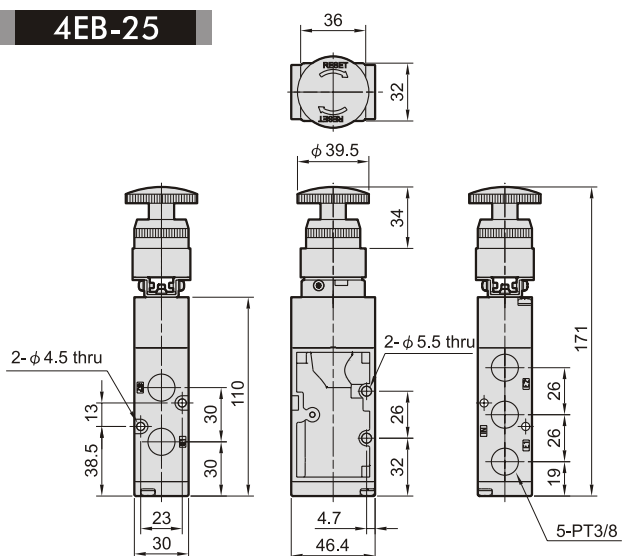


4LB-25

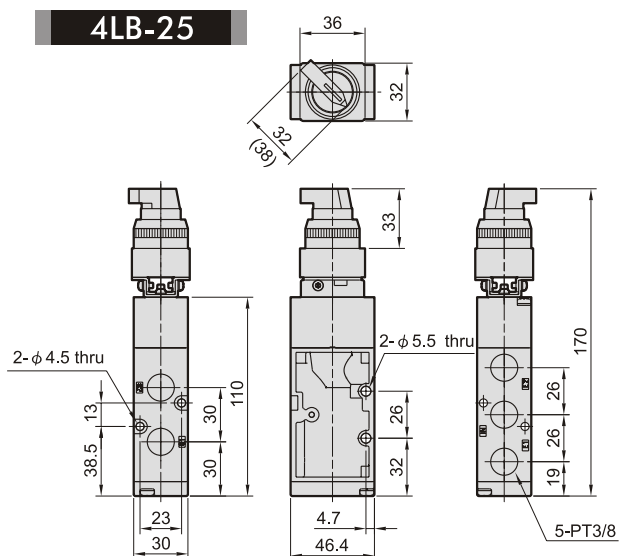


4TB-25

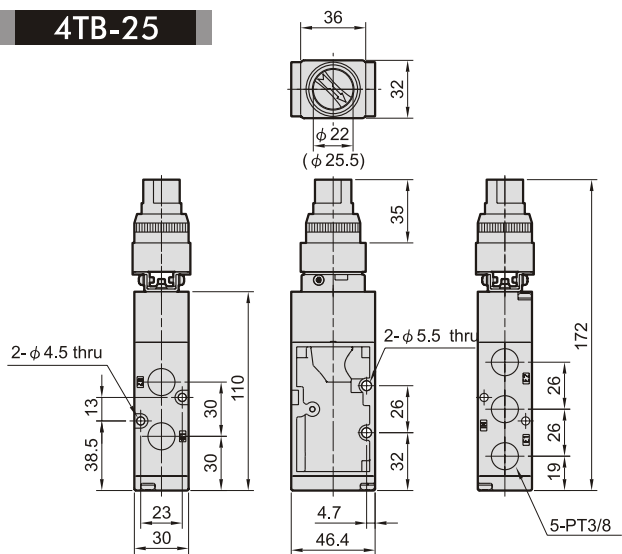

4PB-25

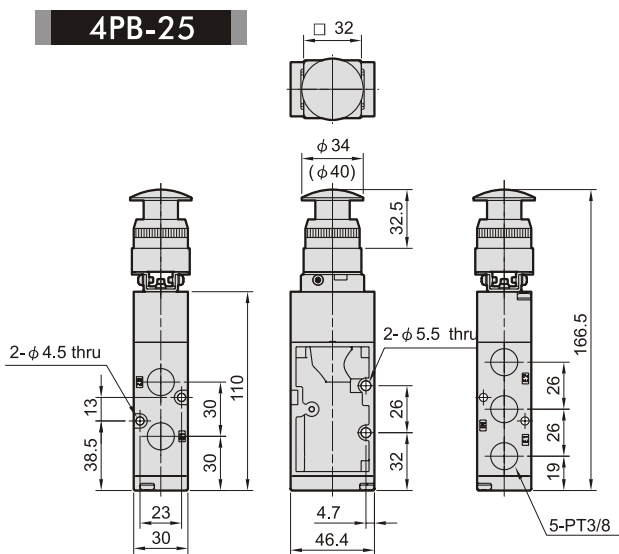

4PP-25

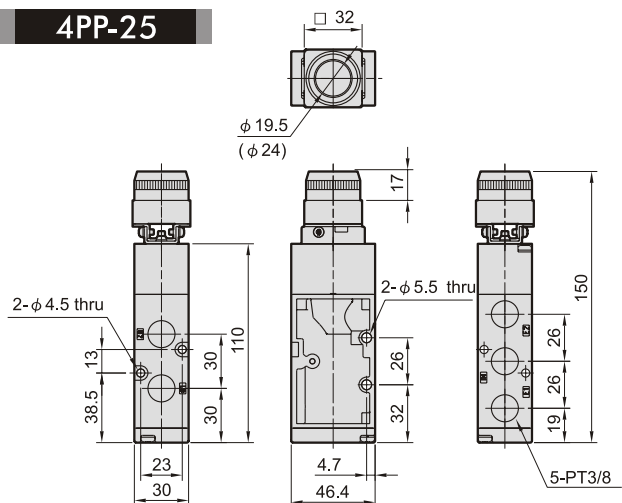

() : Dimension for button size $\phi 30$.